

DATA SHEET

Product: Evo Dual

Product Code: 03-10003

Doc Iss: 01



Note: Computer, Monitors, Keyboard & Mouse Not included




DATA SHEET

Product: Evo Dual

Product Code: 03-10003

Dimensions: Millimetre (mm)

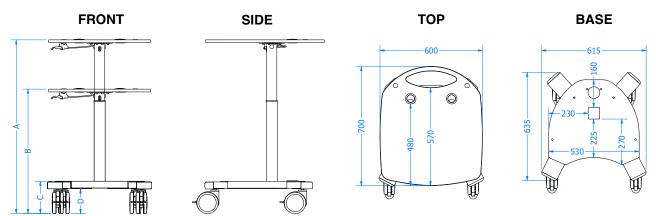

 DIMENSION:
 A
 B
 C
 D

 Single Castor:
 1035
 795
 240
 205

 Dual Castor:
 1020
 780
 240
 190

Core Key Features:

- · Height Adjustable
- Lever positioned on the left or right
- Large Trespa top with rear handle 20kg max load (other load options available)
- · Heavy duty steel base, ergonomic curved front recess
- · Cable entry holes on both top and base
- Accessory mounting holes on both top and base
- · 4 off braking swivel castors
- · High ground clearance
- · Material(s): Trespa, Aluminium, Steel, Plastic
- Finish(s): Anodised, Powder Coat Black Grey RAL7021 (other colours are available)
- Weight: 49kg

Accessories Key Features

· Fully adjustable monitor arm,

Vesa 75 & 100 compliant

Post length options 100, 200, 300, 400,500 and 700mm

Easy rotate between portrait and landscape

Suggested screen size (each): 24" (inch)

Max load: 12kg

Keyboard Panel

Fully adjustable under worktop keyboard surface

Height adjustment of 170mm travel

Tilt the keyboard panel +/- 15°

Swivel left/right +/- 20°

Full length gel wrist rest

Max Load 1.5kg

Mouse Panel

Position on the left or right

Swivel the panel under the top when not in use

Max load 1kg



DATA SHEET

Product: Evo Dual

Product Code: 03-10003

Shelf

Height adjustable

Depth adjustment of 10mm allowing for cable routing of electrical accessories

W520xD220mm Max Load: 10kg

· Rear Cable Tray

Internal storage for small electronic devices, PDU, Cables, etc

Removable rear cover

Flexible cable chain connected to cart top

Front cable entry

Cleaning

- · Refer to the Evo Carts cleaning guide for detailed information
- · Tested active agents
 - → Detergent & Disinfectants
 - Alcohol Based
 - ✓ Ammonia
 - ✓ Chlorine

Operation and Maintenance

- · Secure any loose items before moving.
- Carefully lift castors over large thresholds.
- · Position dual monitors with screens facing one another over the centre of the cart top before moving.
- · Periodic general inspection, check fixings are secure, check free movement of any moving part.